

# DMX-Lighting Controller - DMX-C100

## Function

The DMX-C100 is used for smaller lighting applications to create light shows for up to 170 RGB LED lights or 128 RGBW LED lights with individual addresses. It is a stand alone playback controller with a single program being looped indefinitely. The controller can be programmed with the easy to use software provided and can be configured for various colours and patterns for desired duration.



## Specifications

**Power**

5 Watts

**Input Voltage**

100 - 240V AC, 50Hz - 60Hz

**DMX Channels**


512 (one DMX universe)

**Input connection**

USB Type B

**Output connection**


RJ45

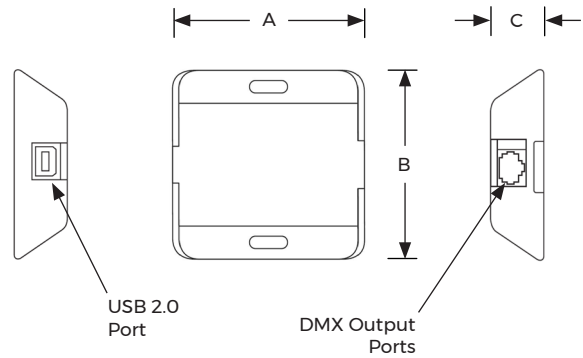


Model No.	Description	A (mm)	B (mm)	C (mm)
DMX-C100	DMX - Lighting controller	89	79	25

\* For Customised light shows, Please contact Aquashi.

## Mounting hole Dimensions

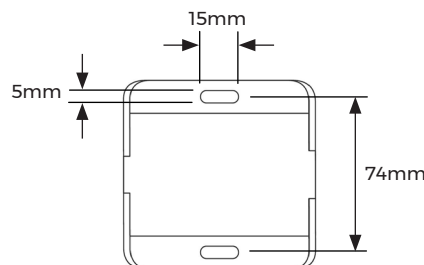

DMX - Lighting Controller	DMX-C Series	Model No. DMX-C100	Rev. 0	
<p>The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.</p>				