

DMX-Lighting Controller - DMX-C200

Function

The DMX-C200 Lighting Controller is used for advanced LED lighting systems. Its programmable to create light shows for up to 340 RGB lights or 256 RGBW LED lights with individual addresses. The controller comes with an easy to use software for creating LED light effects*. An intuitive LED interface and push button keypad enables easy selection of up to five light shows. A removable storage allows the user to update lighting show remotely.



Specifications

Power

5 Watts

Input Voltage

100 - 240V AC (50Hz - 60Hz)

DMX Channels

512 x 2 (two DMX universes)

Input connection


USB Type B

Output connection

RJ45

System Requirements


Windows 7 or greater
(Mac OS 10.6 or greater)
with 512MB RAM,
60MB free disk space.

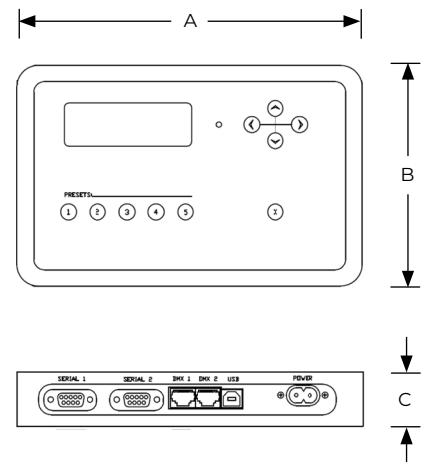

Model No.	Description	A (mm)	B (mm)	C (mm)
DMX-C200	DMX - Lighting controller	209	133	33

* For Customised light shows, Please contact Aquashi.

Connection Ports

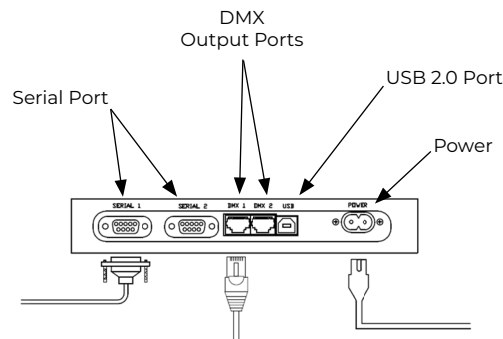

DMX - Lighting Controller	DMX-C Series	Model No. DMX-C200	Rev. 0	
<p>The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.</p>				