## Aeator Jet - Dependent - AJ Series

## Function

This Aerator jet produces a uniform column of highly aerated frothy white water. An integral swivel base permits angled installtion of up to 15 degrees. The adjustable collar controls the air to water ratio. Beautiful when illuminated at night.


Water level dependent.

## **Specifications**

Materials Cast Bronze. Brass and Copper

**Connection type** Female thread

Swivel angle 15°

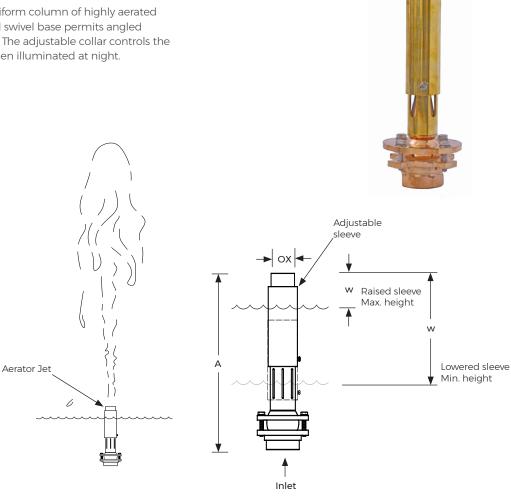

Model No.	Inlet (BSP)	Nozzle Height A (mm)	Orifice Ox (mm)	W (mm) Min / Max	Spray Height (m)	1	2	3	4	6	8	10	12	15
AJ-100	]"	252	32	140 - 50	Flow (LPM)	30	40	50	58					
					Head (m)	4	8.5	11	14.5					
AJ-150	1-1/2"	343	52	160 - 50	Flow (LPM)	40	60	80	88	110	125			
					Head (m)	3.2	5.5	7.2	8.8	12.5	16			
AJ-200	2"	394	65	180 - 50	Flow (LPM)		125	150	170	225	240	260	280	300
					Head (m)		4	6	7.5	10.5	13	16	18.5	23
AJ-250	2-1/2"	455	76	200 - 80	Flow (LPM)		220	270	325	390	450	525	575	640
					Head (m)		8.8	11	12	15	18	21	24	29
AJ-300	3"	547	90	220 - 80	Flow (LPM)		325	390	425	525	585	630	680	765
					Head (m)		8.2	8.8	11	15	18.5	23	27	32

\* Water level should be lower than top of the adjustable sleeve

Aerator Jet - Dependent	AJ Series	Model No. AJ	Rev. 1		
The information contained in this c without the written permission of Aq and data sheets without prior notice	aquashi				