

Precision Jet - PJJ Series

Function

The precision jet produces a solid, non-aerated clear stream of water. It is ideal for applications requiring extremely high spray heights and are capable of heights up to 30 meters.

Optional swivel ball (SWB) or flange connector (SWF).

Water level independent.




Specifications

Materials


Cast Bronze

Connection type

Female thread

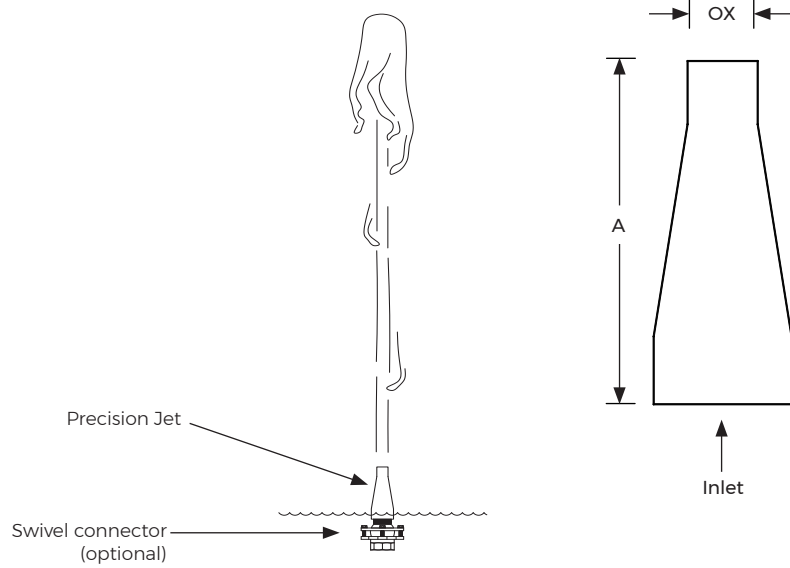

Model No.	Inlet (BSP)	Nozzle Height A (mm)	Orifice Ox (mm)	Spray Height (m)	2	3	4	6	8	10	15	20	30
					Flow (LPM)	Head (m)	Flow (LPM)	Head (m)	Flow (LPM)	Head (m)	Flow (LPM)	Head (m)	Flow (LPM)
PJJ-150	1-1/2"	150	19	Flow (LPM)	96	115	140	196	240	260			
				Head (m)	2.5	4	5.5	7.5	10	12.5			
PJJ-200	2"	205	30	Flow (LPM)	265	320	388	535	680	790	895		
				Head (m)	2.8	4.3	5.6	7.5	10	12.5	19		
PJJ-300	3"	256	45	Flow (LPM)	525	625	810	1150	1375	1535	1785	1995	2435
				Head (m)	3	4.5	5.8	7.6	10.5	12.8	19	25	38
PJJ-400	4"	353	56	Flow (LPM)	795	1015	1250	1825	2195	2450	2875	3250	4030
				Head (m)	3	4.6	6	7.5	10.5	12.75	19	25	38

Precision Jet	PJJ Series	Model No. PJJ	Rev. 0	
<p>The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.</p>				