


# Solenoid Fill Valve - SVB-DC Series

## Function

Brass solenoid valve to be used in conjunction with Water level Controller (WLC-1000 series) to automatically maintain the water level inside the pool. Facilitates manual shut off, slow closure and opening to avoid water hammer.

## Specifications

<b>Material</b> Brass	<b>Pressure</b> 0.2 to 16 Bar
<b>Power</b> 8 W	<b>Flow</b> 19 to 757 LPM
<b>Voltage</b> 24V DC	<b>Connection Type</b> Female thread
<b>Circuit function</b> 2/2-way; normally closed	<b>Protection</b> IP65

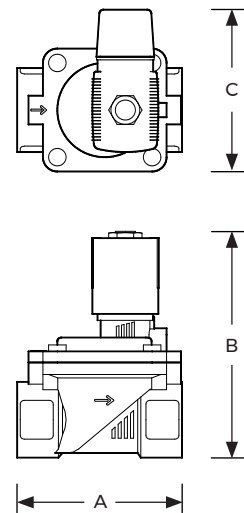

Model No.	Inlet/Outlet (BSP)	Flow (LPM)	A (mm)	B (mm)	C (mm)
SVB-100DC	1"	200	95	122.6	70
SVB-150DC	1-1/2"	300	126	155.6	99
SVB-200DC	2"	667	164	166.6	115

Solenoid Fill Valve	SVB Series	Model No. SVB-DC	Rev. 0	
<p>The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.</p>				