

# Dual Performance Jet - DPJ Series

## Function

The Dual performance jet nozzle can be installed above or below the water level for different spray pattern effects.

Installed above the water level the nozzle produces a precision stream of water, ideal for large displays with spray height of up to 8 meters\*.

When installed below the water surface, the nozzle produces different spray patterns dependent on the spray height and depth installed. Low spray heights will produce a bubbler jet pattern while higher spray heights produces an aerated jet spray pattern.

\*For 8 meter spray height, use 19mm orifice nozzle above water level. (DPJ-075-019)




## Specifications

### Materials

Stainless steel 316L

### Connection type

Male thread

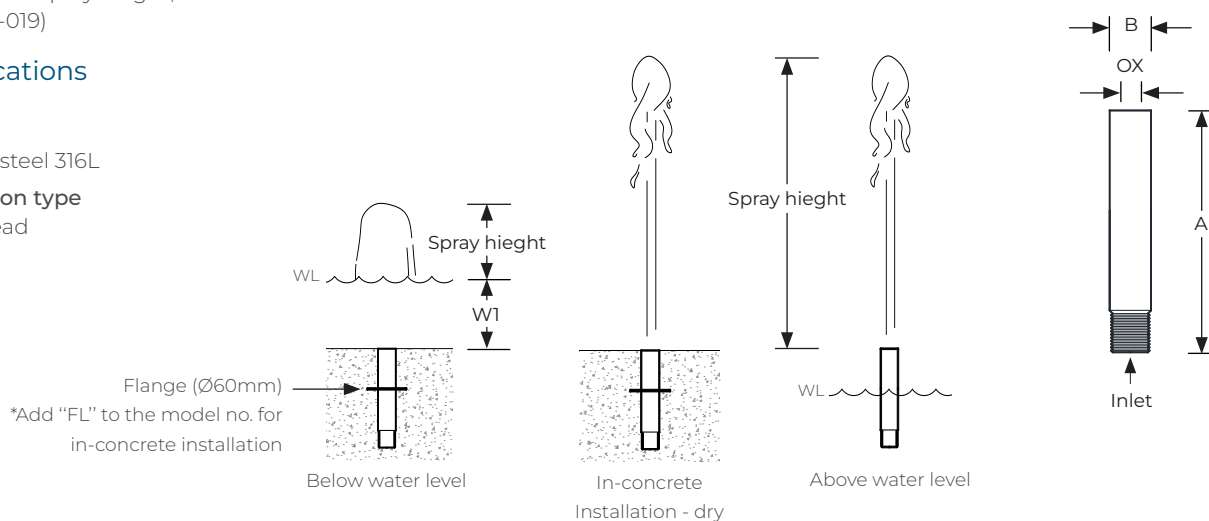

### Above water level


Model No.	Inlet (BSP)	A (mm)	B (mm)	Orifice Ox (mm)	Spray Height (m)	1	2	3	4	5	6	8
DPJ-075-012	3/4"	175	28.5	12	Flow (LPM)	35.2	46.2	57.2	67.1	74.8		
					Head (m)	3.3	5.5	8.8	12.1	14.8		
DPJ-075-019	3/4"	175	28.5	19	Flow (LPM)	91.3	125.4	156.2	176	197	209	244
					Head (m)	1.6	3.9	6.1	8.2	10.5	16.5	22

### Below water level (Orifice: 12mm)

Model No.	Inlet (BSP)	A (mm)	B (mm)	Orifice Ox (mm)	W1 (mm)	Spray Height (m)	0.1	0.3	0.6	0.9	1.2
DPJ-075-012	3/4"	175	28.5	12	40	Flow (LPM)	14.3	26.4	39.6	47.3	55
						Head (m)	0.5	1.1	4.4	6.6	8.8
					100	Flow (LPM)	19.8	38.5	57.2	69.3	78.1
						Head (m)	0.5	4.4	9.9	14.3	18.7

\* Add suffix FL to model number for nozzle with flange (in-concrete installation) i.e. DPJ-075-012-FL

\* For custom water depths contact Aquashi.

Dual Performance Jet	DPJ Series	Model No. DPJ	Rev. 1	
The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.				