## Function

Ultra flat LED Pool Light DVP Series features a lamp with 2mm thick ultra flat stainless steel 316 face plate and matching mounting ring that will be fitted in its niche. The lamps offers a range of fixed colours and dynamic scenarios. Best paired with Remote - Link Touch to have a wider range of control functions such as pool light colour temperature and dimming level adjustment. The LED lamp is fully sealed so water cannot penetrate or damage the fixture. Fitted with the Quick Connect cabling system that is reliable and easy to mount.

RGB LED lights have an embedded 14 programmed animation can be controlled using the Link Driver (RM-200) or by simply turning off and on the lamps in a sequenced manner. Use Link Controller (RM-Link) paired with Link Touch Remote for additional configurations such as Light Dimming function, colour temperature adjustment and more.



## Specifications

**Power** 33W -85W

Voltage 12V AC

**Colours** RGBW / White

Beam Angle:

**Control** On/off or PLC

Dimmable

Use with Link Touch

Cable 2 C - 1 mm<sup>2</sup> Standard Cable Length 2 meters Temperature range:


+40° water temperature Protection Rating:

IP 68 , IEC class III

Niche (sold separately)

Model No.	Description	Colour	Power (W)	Luminous flux (lm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
UF-DVP-050-RGBW	Ø50 DVP- RGBW Ultra flat Pool light with mounting ring	RGBW	23	1200	100	50	2	84	11
UF-DVP-050-WH	Ø50 DVP- White Ultra flat Pool light with mounting ring	White (5700K)	24	2000	100	50	2	84	11
UF-DVP-100-RGBW	Ø100 DVP- RGBW Ultra flat Pool light with mounting ring	RGBW	64	3500	170	100	2	132	11
UF-DVP-100-WH	Ø100 DVP- White Ultra flat Pool light with mounting ring	White (5700K)	59	5500	170	100	2	132	11
UF-DVP-170-RGBW	Ø100 DVP- RGBW Ultra flat Pool light with mounting ring	RGBW	122	7000	270	170	2	208	11
UF-DVP-170-WH	Ø100 DVP- White Ultra flat Pool light with mounting ring	White (5700K)	108	1100	270	170	2	208	11

Ultra flat Pool LED Light	UF-DVP Series	Model No. UF-DVP	Rev. 0	
The information contained in this d without the written permission of Aq and data sheets without prior notice	aquashi			



## LED Pool Lamp

Description	Colour	Power (W)	Luminous flux (lm)	A (mm)	B (mm)	C (mm)	D (BSP)
Ø50 RGBW Pool lamp	RGBW	23	1200	50	10	55	1.5
Ø50 White Pool lamp	White (5700K)	24	2000	50	10	55	1.5
Ø100 RGBW Pool lamp	RGBW	64	3500	100	10	55	1.5
Ø100 White Pool lamp	White (5700K)	59	5500	100	10	55	1.5
Ø170 RGBW Pool lamp	RGBW	122	7000	170	10	55	1.5
Ø170 White Pool lamp	White (5700K)	108	1100	170	10	55	1.5
	Ø50 RGBW Pool lamp Ø50 White Pool lamp Ø100 RGBW Pool lamp Ø100 White Pool lamp Ø170 RGBW Pool lamp	Ø50 RGBW Pool lampRGBWØ50 White Pool lampWhite (5700K)Ø100 RGBW Pool lampRGBWØ100 White Pool lampWhite (5700K)Ø170 RGBW Pool lampRGBW	DescriptionColour(W)Ø50 RGBW Pool lampRGBW23Ø50 White Pool lampWhite (5700K)24Ø100 RGBW Pool lampRGBW64Ø100 White Pool lampWhite (5700K)59Ø170 RGBW Pool lampRGBW122	DescriptionColour(W)flux (Im)Ø50 RGBW Pool lampRGBW231200Ø50 White Pool lampWhite (5700K)242000Ø100 RGBW Pool lampRGBW643500Ø100 White Pool lampWhite (5700K)595500Ø170 RGBW Pool lampRGBW1227000	DescriptionColour(W)flux (Im)(mm)Ø50 RGBW Pool lampRGBW23120050Ø50 White Pool lampWhite (5700K)24200050Ø100 RGBW Pool lampRGBW643500100Ø100 White Pool lampWhite (5700K)595500100Ø170 RGBW Pool lampRGBW1227000170	Description         Colour         (W)         flux (Im)         (mm)         (mm)           Ø50 RGBW Pool lamp         RGBW         23         1200         50         10           Ø50 White Pool lamp         White (5700K)         24         2000         50         10           Ø100 RGBW Pool lamp         RGBW         64         3500         100         10           Ø100 White Pool lamp         White (5700K)         59         5500         100         10           Ø100 White Pool lamp         RGBW         122         7000         170         10	Description         Colour         (W)         flux (Im)         (mm)         (mm)         (mm)           Ø50 RGBW Pool lamp         RGBW         23         1200         50         10         55           Ø50 White Pool lamp         White (5700K)         24         2000         50         10         55           Ø100 RGBW Pool lamp         RGBW         64         3500         100         10         55           Ø100 White Pool lamp         White (5700K)         59         5500         100         10         55           Ø100 White Pool lamp         RGBW         122         7000         170         10         55




## Precautions:

\* DVP series lamps must be completely submerged into water during operation.

\* Fixing the lamps with adhesives or silicone kit into a niche is not allowed.

\* For operation only with safety isolation transformer

## Illumination per m<sup>2</sup>:

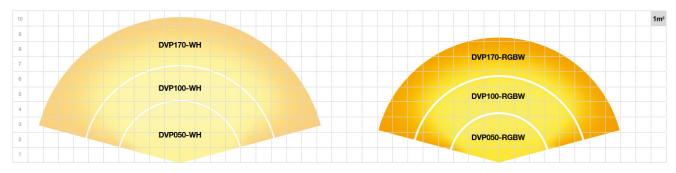


\* Values in graph refer to swimming pools with white or light-coloured walls that require 100 - 150 Im/m<sup>2</sup>.

\* Increase the light (lumen) by 50% for medium colours.

\* Dark walls are difficult to illuminate and need up to 250% extra light.

Ultra flat Pool LED Light	UF-DVP Series	Model No. UF-DVP	Rev. 0	
The information contained in this d without the written permission of Aq and data sheets without prior notice	aquashi			

## **Connection Diagram**

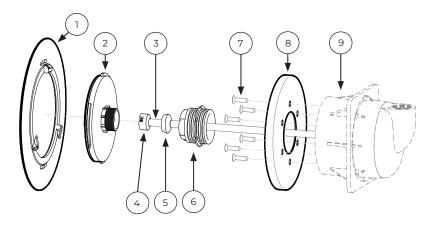

## Lamp Assembly

- # Part Name
- 1 Ø100 Ultra flat faceplate
- 2 DVP-100-RGB

## Quick Connect cable system


## # Part Name

- 3 2 C 1mm<sup>2</sup> Underwater Cable (12V AC )
- 4 Quick connector
- 5 Silicone Gasket
- 6 Fix Nut

## Niche Assembly


#	Part Name
7	4.5 X 20 self tapping Philips flat screw
8	Ø100 mounting ring
9	Niche ( sold separately )

## Typical wiring installation

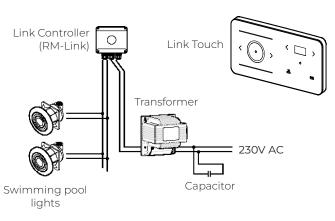

# Deck Box

Typical Swimming Pool Installation



Ultra flat Pool LED Light	UF-DVP Series	MModel No. UF-DVP	Rev. 0	aquashi	
without the written permission of Aq	The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.				

## Synchronizing & color changing (olny for RGBW lamps)

## Manual synchronization

- 1. Turn the lamps ON and make sure all lights up.
- 2. Turn them OFF for MINIMUM 20 seconds
- 3. Switch ON and Switch OFF, Switch ON and Switch OFF
- 4. Switch ON
- 5. The lamps should now all be on colour program 1

#### Using Link Controller (RM-Link) with handheld RF Remote

- 1. Turn the lamps ON and push the UP button 10 times. Wait for 20 seconds, then turn the lamps OFF.
- 2. Repeat this process until the lamps react to the remote. As soon as the lamps follow the remote: wait 1 minute.
- 3. The lamps are now synced.

### Using Link Controller (RM-Link) with Link Touch

- 1. Make sure the Link Touch is paired with Link Controller. To pair, make sure both are in about <2m proximity with each other. Select " Pair Start" on the Link Touch screen then power ON the device. Pairing mode will be in about 2 minutes.
- 2. Turn the lamps on and spin the colour wheel on the Link Touch until the lamps react.
- 3. If the lamps do not react, turn thenm off and back on until they react to the colour wheel.
- 4. As soon as the lamps follow the colour wheel: wait 1 minute.
- 5. The lamps are now synced.

## Changing colors

Turn the lamps OFF and quickly back ON, The lamp will jump to the next colour program.

## Memorizing the actual color

1. Turn the lamps OFF for MINIMUM 20 seconds

2. The chosen colour has now been memorized

## 14 Colour programs ( only for RGBW Lamps )

Program #	Program Name	Colour
1	DEEP BLUE SEA	saturated blue
2	DAYLIGHT BLUE	light blue
3	SUNSET	slow animation from orange to red
4	LOVE IS IN THE AIR	red
5	FOREST SPRING	green
6	THINK PINK	pink
7	SUNSHINE	yellow
8	JUNGLE BEACH	slow animation blue and green tints
9	VOODOO	slow animation red and purple tints
10	DISCO	fast animation lila - pink - peach - yellow - green blue
11	PARTY	fast animation blue - green - red - pink - yellow - green
12	WARM WHITE	3000K
13	NEUTRAL WHITE	6000K
14	SUN WHITE	10500K

Ultra flat Pool LED Light	UF-DVP Series	MModel No. UF-DVP	Rev. 0	
The information contained in this d without the written permission of Aq and data sheets without prior notice	aquashi			

## Accessories



.....

Swimming pool lights
Link Controller
RM-Link
\* for all DVP Series

Swimming pool lights

PZA-WCS-NG

\* Niche for UF-DVP

Hole size: 1.5" BSP

Built-in length: 152 mm

\* for all DVP Series

Link Driver RM-200



PZA-WCS-NG + PZA-FLEX-S \* Niche for UF-DVP Built-in length: 145 mm Hole size: 1.5" BSP Conduit connection: 3/4" BSP





PZA-WCS-NG + PZA-FLEX-NG \* Niche for UF-DVP Built-in length: 225 mm Hole size: 1.5" BSP Conduit connection: 3/4" BSP

Conduit connection: 50mm Pipe



Link Touch - RGBW \* for RGBW lights



PZA-WC-NG + PZA-FLEX-S \* Niche for UF-DVP Built-in length: 262 mm Hole size: 1.5" BSP Conduit connection: 3/4" BSP

**PZA-WC-NG** \* Niche for UF-DVP Built-in length: 269 mm Hole size: 1.5" BSP Conduit connection: 50mm Pipe

PZA-WC-NG + PZA-FLEX-NG \* Niche for UF-DVP Built-in length: 345 mm Hole size: 1.5" BSP Conduit connection: 3/4" BSP

