Link Controller - RM-Link

Function

Link Controller - RM-Link comes with a handheld RF remote which wirelessly controls swimming pool LED lamps. The Link Controller can also integrate with a home automation system via RS-485, CAN bus and DIP switch connections, allowing links with multiple Link Controllers to control more lights. Additionally, it supports DMX 512 communication and features an SD card slot for easy firmware updates.

When used with Link Touch Remote (optional) more configurations will be available, such as Light Dimming function, colour temperature adjustment and more.



- B

Specifications

Input Voltage

12 VAC

Frequency band transmitter

868 MHz


Auxiliary outputs

2 nos.

DMX512 interface: Yes RS485 interface: Yes Link touch Compatible: Yes


Protection Rating

IP 54



Model No.	Description	A (mm)	B (mm)	C (mm)
RM-Link	Link Controller	150	130	54

Typical Wiring Installation

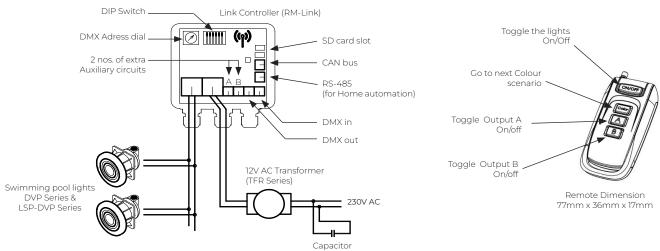

Accessories



Link Touch - RGB(W)
* for RGB or RGBW lights



Link Touch - TW * for tunable white lights

Link Controller	RM Series	Model No. RM-Link	Rev. 1
			l .

The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.



AQUASHI.CO.UK PG. 1/1