


Concealed Slot Inlet - SIC Series

Function

The Concealed Slot Inlet is designed to provide a water Inlet for fountain features without exposing the inlet grating for a more aesthetic look. The cover should be filled with surrounding tile up to 3cm thick to perfectly blend into the feature. Ideal for shallow pools.

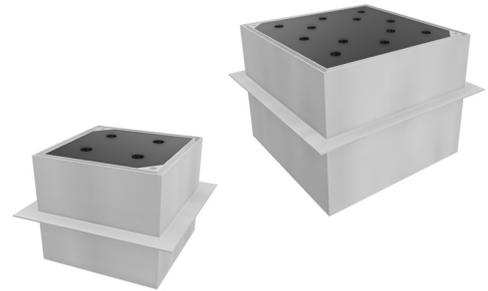




Specifications

Materials

Stainless steel 316


Shape

Square

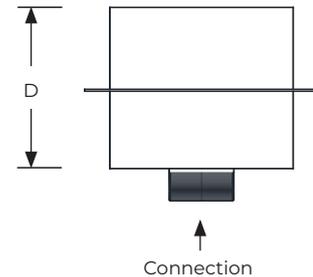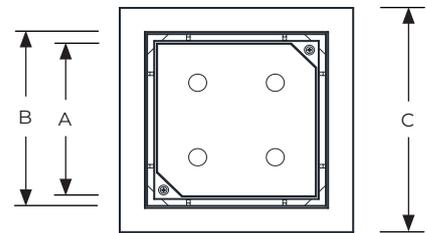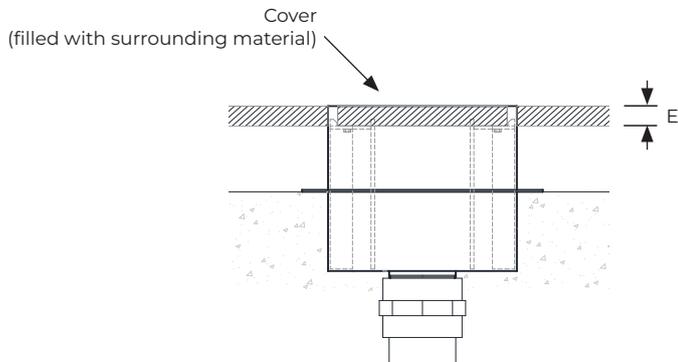

Model No.	Connection Size	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
SIC-010	3"	229	255	325	250	30
SIC-016	4"	381	407	477	300	30

Tile-cut Profile

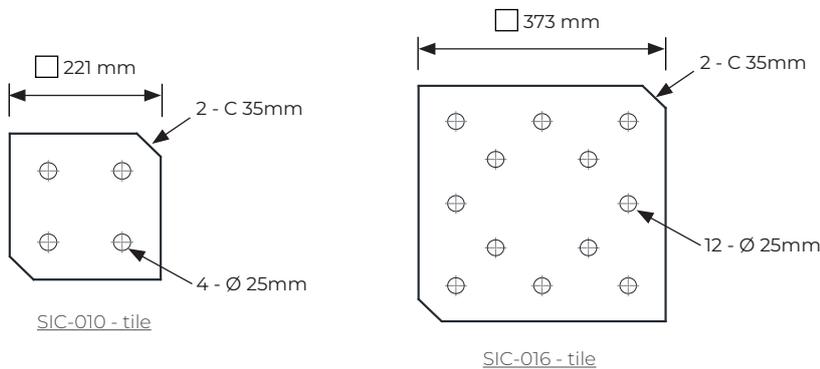

Model No.	Recommended Max. Flow (m ³ /Hr)
SIC-010	18 (0.5 m/s)
SIC-016	27 (0.5 m/s)



follow tile-cut profile (holes) to achieve the recommended flow rate

Concealed Slot Inlet	SIC Series	Model No. SIC	Rev. 0	
<p>The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.</p>				