

Floor Water Level Sensor - FLS Series

Function

The Floor water level sensor can be installed as a fixed or movable type sensor. The fixed type can be installed on an electrical stub up while movable type is connected with a flexible cable in the side enabling it to be moved within the reach of the cable. The electronic sensor(s) automatically monitor quick fill and safe off functions.

The sensors are 40mm adjustable in height. Low voltage for safety. To be used in conjunction with water level controller (WLC-1000 series) for controlling solenoid valves or other requirement. Available with 1, 2 or 3 sensors for quick fill, safe-off or maximum level control.



Specifications

Materials

Stainless steel 316,
Cast Bronze, Cord Seal

Protection Rating


IP68

Electrical Connection

Volt Free Contact


Connection type

Female thread (side or bottom)

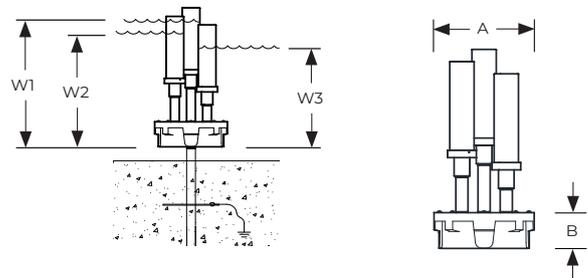

Fixed type Floor Water Level Sensor

Model No.	No. of Sensors	Description	Bottom Connection (BSP)	W1 (mm)	W2 (mm)	W3 (mm)	A (mm)	B (mm)
FLS-F-100	1	Sensor for Quick fill or Safe off function	1/2"	325	-	-	155	65
FLS-F-200	2	Sensor for Quick fill + Safe off function	1/2"	325	303	-	155	65
FLS-F-300	3	Sensor for Hi-Alarm + Quick fill + Safe-off function or for Quick fill off + Quick fill on + Safe off function	3/4"	325	303	314	155	65

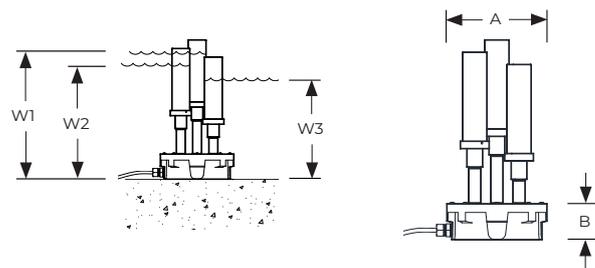

Moveable type Floor Water Level Sensor

Model No.	No. of Sensors	Sensor Controls	Bottom Connection (BSP)	W1 (mm)	W2 (mm)	W3 (mm)	A (mm)	B (mm)
FLS-M-100	1	Sensor for Quick fill or Safe off function	1/2"	325	-	-	155	65
FLS-M-200	2	Sensor for Quick fill + Safe off function	1/2"	325	303	-	155	65
FLS-M-300	3	Sensor for Hi-Alarm + Quick fill + Safe-off function or for Quick fill off + Quick fill on + Safe off function	3/4"	325	303	314	155	65

Water Level Sensor	FLS Series	Model No. FLS	Rev. 2	
<p>The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.</p>				





Floor Water Level Sensor - FLS Series

Note:

- Safe-off operation shuts off all in-pool electrical functions during low level conditions.
- Quick fill operation triggers fresh water supply valve to replenish the water loss in the pool.
- Hi-Alarm operation shuts down all in-pool electrical functions until high water level is resolved.

** Check installation manual for a more detailed explanation.

Sample sensor usage:

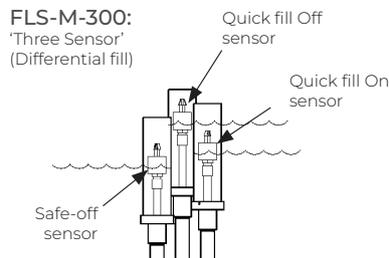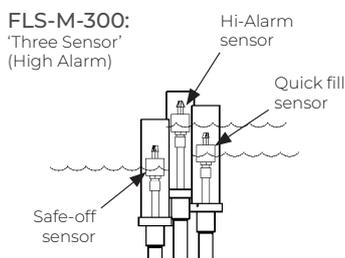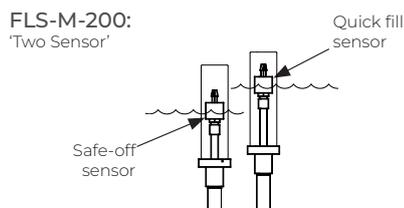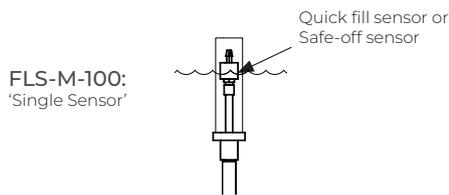

Accessories (Sold Separately)



Water Level Controller
 * WLC-100 (for single sensor)
 * WLC-200 (for two sensor)
 * WLC-300 (for three sensor)



Water Level Controller
 * WLC-1000

Water Level Sensor	FLS Series	Model No. FLS	Rev. 2	
<p>The information contained in this drawing is the sole property of Aquashi. Any reproduction in part or as a whole without the written permission of Aquashi is prohibited. Aquashi reserves the right to update all designs, specifications and data sheets without prior notice.</p>				